



## Table of Contents

 FPF-ST BZP..... Page 97

 FPF-ST BZF..... Page 99

## Your benefits

### Chipboard screw Power-Fast bonus-zinc

- Significant higher corrosion resistance compared to conventional coating types
- For save outdoor installations
- Lasting safety with ETA conformity
- Easy to screw in thanks to the innovative fischer Power-Fast thread shape



### Countersunk head

- For surface-flush screwing
- Can be easily sunk to create a clean surface finish



3  
Chipboard screw Power-Fast bonus-zinc




### Bonus-zinc surface refinement

- Considerably higher corrosion resistance within the salt-spray-testing compared to conventional surface coatings (1500 hrs. acc. to DIN EN ISO 9227:2006)
- Provides clear advantages for timber constructions in protected outdoor areas e.g. winter garden, carports or balustrade




## PPF-ST BZP

- Material: Steel
- Coating: Zinc flake coating
- Drive: TX-Star recess
- Thread: Partial thread
- Screw head: Countersunk head

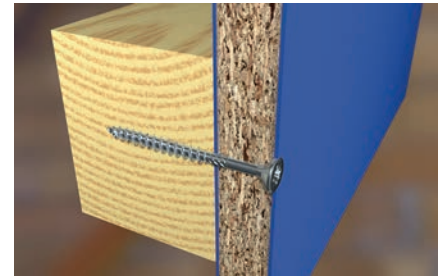



3

Chipboard screw Power-Fast bonus-zinc


Diameter d [mm]	Length l [mm]	Partial thread length lg [mm]	Head-Ø dk [mm]	Drive 	Art. No.	Sales unit [pcs]	GTIN (EAN Code)
<b>3.5</b>	30	18	7.0	TX10	<b>669002</b>	200	4048962201307
	35	24	7.0	TX10	<b>532810</b>	500	4048962219128
	40	24	7.0	TX10	<b>669004</b>	200	4048962201321
	50	30	7.0	TX10	<b>669005</b>	200	4048962201338
<b>4.0</b>	30	18	8.0	TX20	<b>669008</b>	200	4048962201369
	35	24	8.0	TX20	<b>669009</b>	200	4048962201376
	40	24	8.0	TX20	<b>669010</b>	200	4048962201383
	40	24	8.0	TX20	<b>669011</b>	500	4048962201390
	45	30	8.0	TX20	<b>669012</b>	200	4048962201406
	60	36	8.0	TX20	<b>669014</b>	200	4048962201420
<b>4.5</b>	70	42	8.0	TX20	<b>669015</b>	200	4048962201437
	30	18	9.0	TX20	<b>669018</b>	200	4048962201468
	35	24	9.0	TX20	<b>669019</b>	200	4048962201475
	40	24	9.0	TX20	<b>669020</b>	200	4048962201482
	50	30	9.0	TX20	<b>669021</b>	200	4048962201499
<b>5.0</b>	60	36	9.0	TX20	<b>669022</b>	200	4048962201505
	50	30	10.0	TX25	<b>669048</b>	200	4048962201765
	60	36	10.0	TX25	<b>669049</b>	200	4048962201772
	70	42	10.0	TX25	<b>669050</b>	200	4048962201789
	80	50	10.0	TX25	<b>669051</b>	200	4048962201796
	90	60	10.0	TX25	<b>669052</b>	200	4048962201802
	100	60	10.0	TX20	<b>669034</b>	100	4048962201628
	120	70	10.0	TX20	<b>669035</b>	100	4048962201635
<b>6.0</b>	120	70	10.0	TX25	<b>669054</b>	100	4048962201826
	50	30	12.0	TX30	<b>669036</b>	200	4048962201642
	60	30	12.0	TX30	<b>669037</b>	200	4048962201659
	70	30	12.0	TX30	<b>669038</b>	200	4048962201666
	80	50	12.0	TX30	<b>669039</b>	200	4048962201673
	90	50	12.0	TX30	<b>669040</b>	200	4048962201680
	100	50	12.0	TX30	<b>669041</b>	100	4048962201697
	120	50	12.0	TX30	<b>669042</b>	100	4048962201703
	120	50	12.0	TX30	<b>532811</b>	25	4048962219135
	160	70	12.0	TX30	<b>669044</b>	50	4048962201727

**FPF-ST BZP**

- **Material:** Steel
- **Coating:** Zinc flake coating
- **Drive:** TX-Star recess
- **Thread:** Partial thread
- **Screw head:** Countersunk head

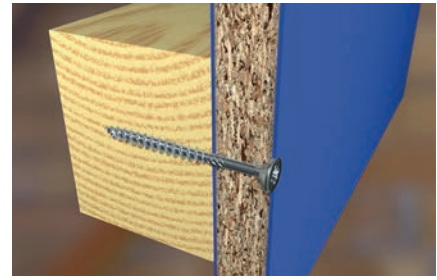


3


Diameter d [mm]	Length l [mm]	Partial thread length l <sub>g</sub> [mm]	Head-Ø d <sub>k</sub> [mm]	Drive 	Art. No.	Sales unit [pcs]	GTIN (EAN Code)
<b>6.0</b>	180	70	12.0	TX30	<b>669045</b>	50	4048962201734
	200	70	12.0	TX30	<b>669046</b>	50	4048962201741
	220	70	12.0	TX30	<b>669047</b>	50	4048962201758

Chipboard screw Power-Fast bonus-zinc

## FPF-ST BZF

- **Material:** Steel
- **Coating:** Zinc flake coating
- **Drive:** TX-Star recess
- **Thread:** Full thread
- **Screw head:** Countersunk head



Diameter d [mm]	Length l [mm]	Partial thread length l <sub>g</sub> [mm]	Head-Ø d <sub>k</sub> [mm]	Drive 	Art. No.	Sales unit [pcs]	GTIN (EAN Code)
<b>3.5</b>	15	10	7.0	TX10	<b>532808</b>	500	4048962219104
	25	–	7.0	TX10	<b>669001</b>	200	4048962201291
	25	20	7.0	TX10	<b>532809</b>	500	4048962219111
<b>4.0</b>	20	–	8.0	TX20	<b>669006</b>	200	4048962201345
	25	–	8.0	TX20	<b>669007</b>	200	4048962201352
<b>4.5</b>	20	–	9.0	TX20	<b>669016</b>	200	4048962201444
	25	–	9.0	TX20	<b>669017</b>	200	4048962201451